



Video Guidance System



Accuracy


- The video screen simultaneously shows the roadway immediately under the pointer as well as the horizon. This allows the operator to sight ahead for straight lines and precisely track through curves.
- The video camera adjusts for perfect alignment with the spray guns and pointer for repeatable and effortless straight and curved lines.
- When the pointer is used in conjunction with the system delay feature, the operator always faces forward for precise starts and stops.

Ease of Use

- Changing from center-line to edge-line striping is accomplished in minutes.
- Forward viewing is easy on the operator without sacrificing straight line quality.
- The color video screen system ensures excellent visibility even in low-light conditions.
- The small profile video monitor mounts conveniently in the truck cab without obstructing forward vision, and ON/OFF and brightness adjustments are within easy reach.

Labor Savings

- One operator easily applies temporary, new, and restripe lines, eliminating the need for a rear operator.
- Difficult-to-follow edge-line striping no longer takes two operators or a dual steering vehicle.
- For one third the price of a typical striping truck, you can combine a RoadLazer and Video Guidance System – the lowest cost and most accurate, convenient, economical, and easy-to-use road striper available.

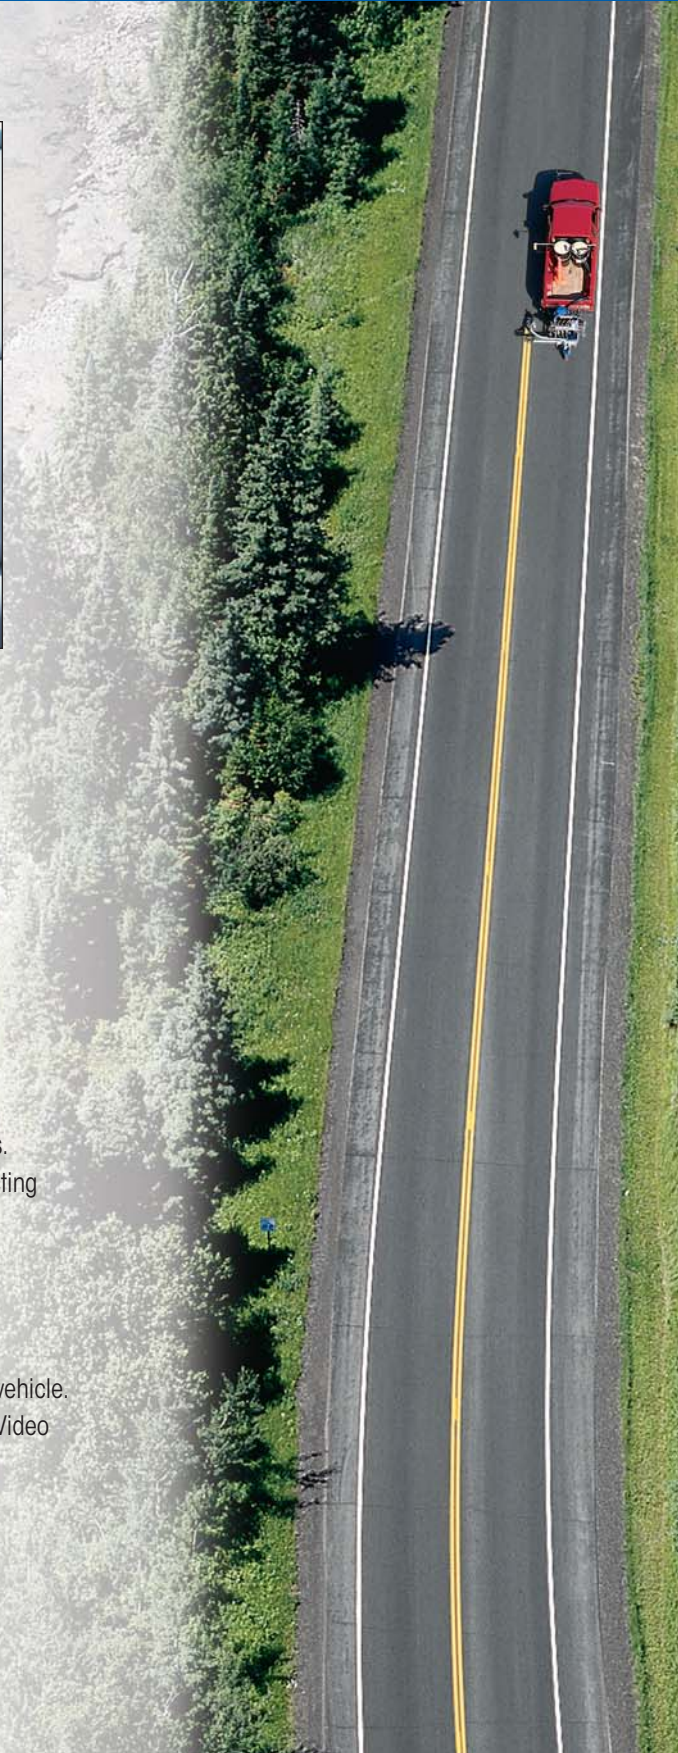




The Complete Picture.

Graco's Video Guidance System makes striping a single-person operation. It offers excellent forward viewing for checking alignment while restriping and for following control marks when applying new lines.

That's incredible labor savings with increased production and improved quality.

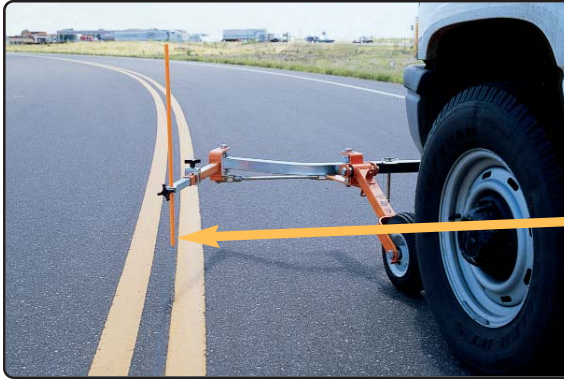

Tracing curves is easy. Simply keep the indicator on the existing line or reference marks. The Line Tracking System compensates for curved lines, indicating where the spray guns will follow.



For effortless straight lines that are *Lazer* sharp, sight higher on the indicator, reducing the need for frequent corrections.

When used with the System Delay feature, the indicator chain becomes the forward start/stop point. **NO MORE LOOKING BACK AT THE GUNS TO SEE WHERE THE LINE STARTS AND STOPS.**

Spray Tip Recommendations

Complete Video Guidance System	238683
Electrical Requirements	
Camera	12 vdc
Monitor	12 vdc
Operating Temperature	32° to 130° F (0° to 54° C)

Spray Tip Recommendations

Camera and Bracket	15 lb (6.8 kg)
Monitor	3 lb (1.4 kg)

Dimensions

Camera and Bracket	11 in. L x 77 in. W x 8 in. H
.....	(280 mm x 1960 mm x 205 mm)
Monitor	8 in. L x 9 in. W x 9 in. H
.....	(205 mm x 230 mm x 230 mm)
Additional Camera and Enclosure	238947*
Additional Power Cable	192232
Instruction Manual	309008

*Does not include hardware or mounting brackets

